

(4) #44-1/8" STAINLESS STEEL RIVETS, PRE-PAINTED TO MATCH PANELS.

(4) #44-1/8" STAINLESS STEEL RIVETS SPACED AS SHOWN. (typ.)



PANEL DIAGRAM FASTENER LOCATION

PANEL EDGE STIFFENER DOUBLE MATERIAL THICKNESS. RIVETED TO PANEL EDGE AS ILLUSTRATED.

TURN PANEL SEAM CAP DOWN IN FIELD.


(6) #44-1/8" STAINLESS STEEL RIVETS, PRE-PAINTED TO MATCH PANELS.

SEALANT BED SANDWICHED BETWEEN EACH PANEL LEG. (typ.)

CONTINUOUS NEOPRENE CLOSURE. APPLY (2) ROWS OF GUNABLE, NON-CURING SEALANT TO THE TOP SIDE. (by Manufacturer) typ.

NOTE: REFERENCE SHOP DRAWINGS FOR THE REQUIREMENT OR NON-REQUIREMENT OF THE NEOPRENE CLOSURE.

(6) #44-1/8" STAINLESS STEEL RIVETS SPACED AS SHOWN. (typ.)




PANEL DIAGRAM FASTENER LOCATION

2" LAP @ JOINTS. DO NOT PENETRATE LAP WITH RIVETS.

EXPANSION CLEARANCE OF 1/4"

NOTCH OUT AND DISCARD INSIDE TAB.

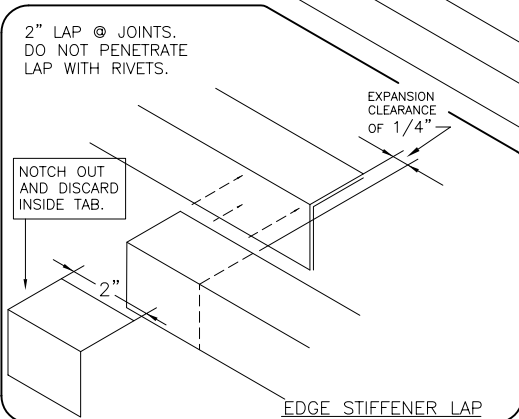

EDGE STIFFENER LAP

CONTINUOUS NEOPRENE CLOSURE. APPLY (2) ROWS OF GUNABLE, NON-CURING SEALANT TO THE TOP SIDE. (by Manufacturer) typ.

NOTE: REFERENCE SHOP DRAWINGS FOR THE REQUIREMENT OR NON-REQUIREMENT OF THE NEOPRENE CLOSURE.



INNOVATIVE METALS COMPANY, INC
2070 STEEL DRIVE, TUCKER GA 30084-5832
— PHONE 1-800-646-3826 / FAX 770-908-2264 —

DETAIL:

Seam-End Closure Detail
12", 16", 18" Panels

SECTION:

(PS) Panel System Installations